


4SR - HYDRAULIQUES SEULES

A TURBINES FLOTTANTES



TYPE 4SR - PS	ISO 228/1 en mm		DIMENSIONS avec moteurs 4PS						Poids pompe complète kg		Prix HT Hydraulique	
	kW	DN	h1	h2 Mono	h2 Tri	h Mono	hTri	Mono	Tri	Code		
4SR1/13	0.37	1"1/4	400	237	237	637	637	12	12	J1A1010	376	
4SR1/18	0.55	1"1/4	517	257	237	774	754	14	13	J1A1020	447	
4SR1/25	0.75	1"1/4	646	272	257	918	903	17	16	J1A1030	513	
4SR1/35	1.10	1"1/4	856	312	272	1168	1128	21	19	J1A1040	726	
4SR1/45	1.50	1"1/4	1065	352	297	1417	1362	25	23	J1A1050	1 071	
4SR2/7	0.37	1"1/4	290	237	237	527	527	11	11	J1A107X	305	
4SR2/10	0.55	1"1/4	345	257	237	602	582	13	11	J1A108X	338	
4SR2/13	0.75	1"1/4	400	272	257	672	657	14	13	J1A109X	395	
4SR2/20	1.10	1"1/4	554	312	272	866	826	18	16	J1A110X	461	
4SR2/27	1.50	1"1/4	683	352	297	1035	980	22	19	J1A111X	546	
4SR2/39	2.20	1"1/4	929	402	352	1331	1281	25	24	J1A111Y	726	
4SR4/7	0.55	1"1/4	314	257	237	571	551	12	11	J1A1120	317	
4SR4/9	0.75	1"1/4	358	272	257	630	615	14	13	J1A113X	326	
4SR4/14	1.10	1"1/4	468	312	272	780	740	17	15	J1A114X	390	
4SR4/18	1.50	1"1/4	580	352	297	932	877	20	18	J1A115X	455	
4SR4/26	2.20	1"1/4	756	402	352	1158	1108	23	22	J1A1160	565	
4SR4/35	3.00	1"1/4	978	-	484	-	1462	-	24	J1A1170	720	
4SR4/46	4.00	1"1/4	1295	-	574	-	1869	-	39	J1A1175	1 351	
4SR4/60	5.50	1"1/4	1652	-	664	-	2316	-	48	J1A1177	1 624	
4SR6/4	0.55	2"	281	257	237	538	518	12	11	J1A1180	310	
4SR6/6	0.75	2"	341	272	257	613	598	14	12	J1A1190	332	
4SR6/9	1.10	2"	431	312	272	743	703	16	14	J1A1200	369	
4SR6/13	1.50	2"	576	352	297	928	873	20	18	J1A1210	442	
4SR6/17	2.20	2"	695	402	352	1097	1047	22	21	J1A1220	500	
4SR6/23	3.00	2"	900	-	484	-	1384	-	23	J1A1230	643	
4SR6/31	4.00	2"	1164	-	574	-	1738	-	35	J1A1240	794	
4SR6/42	5.50	2"	1519	-	664	-	2183	-	44	J1A1250	1 245	
4SR6/56	7.50	2"	2063	-	764	-	2827	-	54	J1A1255	1 745	
4SR8/4	0.75	2"	281	272	257	553	538	13	12	J1A1260	338	
4SR8/7	1.10	2"	371	312	272	683	643	16	14	J1A1270	363	
4SR8/9	1.50	2"	431	352	297	783	728	19	16	J1A1280	404	
4SR8/13	2.20	2"	576	402	352	978	928	21	20	J1A1290	466	
4SR8/17	3.00	2"	695	-	484	-	1179	-	21	J1A1300	532	
4SR8/23	4.00	2"	900	-	574	-	1474	-	33	J1A1310	675	
4SR8/31	5.50	2"	1164	-	664	-	1828	-	40	J1A1320	810	
4SR8/42	7.50	2"	1519	-	764	-	2283	-	47	J1A1330	1 291	
4SR10/6-N	0.75	2"	614	272	257	888	871	15	14	J1A1341	479	
4SR10/8-N	1.10	2"	759	312	272	1074	1031	18	16	J1A1351	540	
4SR10/11-N	1.50	2"	978	352	297	1333	1275	22	20	J1A1361	771	
4SR10/16-N	2.20	2"	1343	402	352	1748	1695	26	25	J1A1371	933	
4SR10/22-N	3.00	2"	1780	-	484	-	2264	-	29	J1A1381	1 201	
4SR10/30-N	4.00	2"	2363	-	574	-	2937	-	44	J1A1391	1 476	
4SR10/41-N	5.50	2"	3165	-	664	-	3829	-	55	J1A1401	1 841	
4SR12/5-N	0.75	2"	538	272	257	815	795	14	13	J1A1411	405	
4SR12/7-N	1.10	2"	687	312	272	1001	959	18	16	J1A1421	479	
4SR12/9-N	1.50	2"	832	352	297	1187	1129	21	19	J1A1431	540	
4SR12/14-N	2.20	2"	1197	402	352	1602	1549	25	24	J1A1441	802	
4SR12/19-N	3.00	2"	1562	-	484	-	2046	-	27	J1A1451	976	
4SR12/25-N	4.00	2"	1999	-	574	-	2573	-	41	J1A1461	1 242	
4SR12/34-N	5.50	2"	2655	-	664	-	3319	-	50	J1A1471	1 525	
4SR12/41-N	7.50	2"	3165	-	764	-	3929	-	62	J1A1472	1 767	
4SR15/6-N	1.10	2"	614	312	272	928	886	17	15	J1A1481	479	
4SR15/8-N	1.50	2"	759	352	297	1114	1056	21	18	J1A1491	540	
4SR15/12-N	2.20	2"	1051	402	352	1456	1403	24	23	J1A1501	771	
4SR15/16-N	3.00	2"	1343	-	484	-	1827	-	25	J1A1511	894	
4SR15/21-N	4.00	2"	1707	-	574	-	2281	-	38	J1A1521	1 168	
4SR15/29-N	5.50	2"	2291	-	664	-	2955	-	47	J1A1531	1 460	
4SR15/39-N	7.50	2"	3020	-	764	-	3784	-	61	J1A1532	1 678	

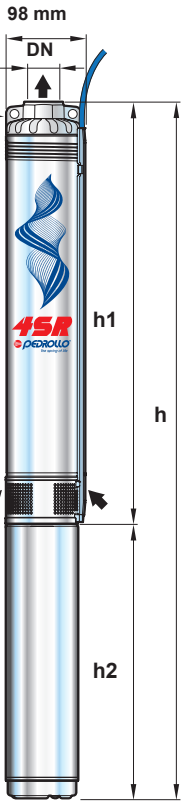

Intensité des moteurs - voir pages 3.31 et 3.33.