



Wilo-Tagus



Conception

Dégazeur à étage de pression

Utilisation

- Installations de chauffage en circuit fermé
- installations de réfrigération

Vos avantages

- Purge et réalimentation efficaces assurant un fluide de qualité grâce au dégazage central du fluide du système comme du fluide de réalimentation
- Système de réalimentation autorégulé à eau dégazée grâce au mode de fonctionnement Turbo et au contact externe de réalimentation (230 V)
- Monté et prêt à être branché.
- Commande simple et intelligible grâce à l'écran intuitif.
- Dégazage actif garanti par la technologie brevetée de bague Pall assurant des capacités de purge améliorées
- Pompe intégrée à moteur ventilé des gammes MHI

Groupe de prix : PG6

Informations de commande			
Automate de dégazage et de réalimentation	Raccordement de l'entrée	Raccordement de sortie	N° d'art.
Tagus vac 7	G ¾	G ¾	2202012
Tagus vac 10	G ¾	G ¾	2198925
Tagus vac 20	G ¾	G ¾	2198926
Tagus vac 30	G ¾	G ¾	2198927

Groupe de prix : PG6

Informations de commande	
Accessoires Tagus	N° d'art.
Top-Up Unit 1.1	2198929
Top-Up Unit 1.2	2198930


Groupe de prix : PG6

Informations de commande	
Accessoires Tagus	N° d'art.
Top-Up Unit 2.1	2198931
Top-Up Unit 2.2	2198932

Sous réserve de modifications techniques. Tous les prix s'entendent Hors Taxes, applicables au 1er janvier 2020.

Wilo-Tagus vac 7 – 30

- Working temperature: 3 °C to 70 °C.
- Maximum (feed) supply temperature in the system: 120 °C.
- Ambient temperature: > 3 °C to 45 °C.
- Maximum pressure in the suppletion feed line: 2 to 8 bar.
- Noise production: approx. 55 dB(A).
- Electrical connection 230 V 50 Hz.
- Suitable for addition of glycol-based anti-freeze up to 30 %.
- Complies with the following guidelines:
Machinery Directive 2006/42/EC.
PED 2014/68/EU.

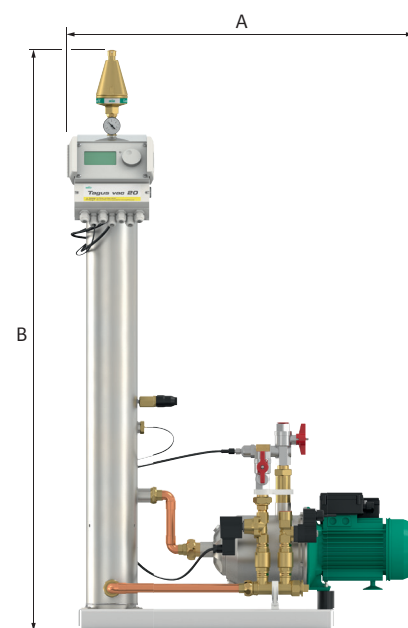

Technical data


Type	Connection	Max. working pressure	Operating pressure	Dimensions			Weight	Order Code
		bar	bar	A mm	B mm	C mm	kg	
Wilo-Tagus vac 7	Rp ¾"	8	0.8 – 2.7	740	1270	325	40	2202012
Wilo-Tagus vac 10	Rp ¾"	8	0.8 – 3.5	740	1270	325	40	2198925
Wilo-Tagus vac 20	Rp ¾"	8	2.0 – 4.5	740	1270	325	45	2198926
Wilo-Tagus vac 30	Rp ¾"	10	3.0 – 8.0	710	1270	525	60	2198927

Accessories for Topping-up

For heating and chilled water (cooling) installations.

Wilo-Top-Up Unit 1.X

Used for direct top-up from drinking water supply according to DIN 1988 and DIN EN 1717.

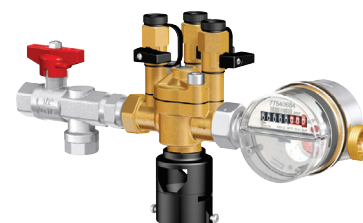

- Consists of a backflow preventer, water meter, ball valve and non-return valve.
- Maximum operating pressure: 10 bar.
- Maximum operating temperature: 65 °C.


Technical data

Type	Connection to		Length	K _{vs} (backflow preventer)	Weight	Order Code
	Drinking water	System				
	Rp ½"	G ¾"	mm	m ³ /h	kg	
Wilo-Top-Up Unit 1.1	Rp ½"	G ¾"	355	2	3	2198929
Wilo-Top-Up Unit 1.2*	Rp ½"	G ¾"	355	2	3	2198930

* Wilo-Top-Up Unit 1.2 has an impulse output water meter (10 litres / impulse).

Wilo-Top-Up Unit 2.X

Used for top-up from a water supply where a backflow preventer is not needed.



- Consists of a water meter, ball valve and non-return valve.
- Maximum operating pressure: 10 bar.
- Maximum operating temperature: 90 °C.

Technical data

Type	Connection to		Length	Weight	Order Code
	Drinking water	System			
	Rp ½"	G ¾"	mm	kg	
Wilo-Top-Up Unit 2.1	Rp ½"	G ¾"	200	2	2198931
Wilo-Top-Up Unit 2.2*	Rp ½"	G ¾"	200	2	2198932

* Wilo-Top-Up Unit 2.2 has an impulse output water meter (10 litres / impulse).