

DIN

DIN 11 851

MATERIAL MATIÈRE MATERIAL

 SS = Stainless steel **Inox**


SIZE DIMENSIONS DIMENSIONES

From DN 25 to 150 mm

THREAD FILETAGE ROSCA

DIN 405

MALE PART NEZ FILETÉ



DN	F	d
10	28x1/8"	10
15	34x1/8"	16
20	44x1/6"	20
25	52x1/6"	26
32	58x1/6"	32
40	65x1/6"	38
50	78x1/6"	50
65	95x1/6"	66
80	110x1/4"	81
100	130x1/4"	100
125	160x1/4"	125
150	190x1/4"	150

FEMALE PART PIÈCE LISSE



A	d
22	10
28	16
36	20
44	26
50	32
56	38
68	50
86	66
100	81
121	100
150	125
176	150

NUT ECRou




F	A	L
28x1/8"	38	18
34x1/8"	44	18
44x1/6"	54	21
52x1/6"	63	21
58x1/6"	70	21
65x1/6"	78	21
78x1/6"	92	22
95x1/6"	112	25
110x1/4"	127	30
130x1/4"	148	31
160x1/4"	178	35
190x1/4"	210	40

GASKET JOINT DE RACCORD



A	B	L
20	12	4,5
26	18	4,5
33	23	4,5
40	30	5
46	36	5
52	42	5
64	54	5
81	71	5
95	85	5
114	104	6
142	130	7
167	155	7

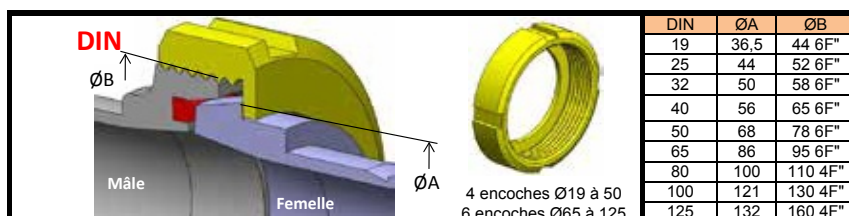

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2018

			DN coupling Diam. raccord Diam. racor	DN shank Diam. douille Diam. espiga	Ref.	Notes
 Female. Serrated hose shank. For circlip. Femelle. Douille crantée. Pour jonc. Hembra. Caña acanalada. Para anillo.	PAGE 99. Circlip and ferrule. Jupe et jonc. Junta y anillo.	SS 316L	25	25	0116988	
			32	32	5100289	
			40	38	0116936	
			50	51	0116737	
			65	63	0116912	
			80	76	0116915	
			100	101,5	0117016	
			125	125	5100315	
			150	150	5100941	
 Male. Serrated hose shank. For circlip. Mâle. Douille crantée. Pour jonc. Macho. Caña acanalada. Para anillo.	PAGE 99. Circlip and ferrule. Jupe et jonc. Junta y anillo.	SS 316L	25	25	0116989	
			32	32	5100288	
			40	38	0116935	
			50	51	0116738	
			65	63	0116911	
			80	76	0116914	
			100	101,5	0117015	
 Nut. Ecrou. Tuerca.		SS 304	25		0116985	
			32		5100287	
			40		0116934	
			50		0116739	
			65		0116910	
			80		0116913	
			100		0117012	
			125		5100313	
 Rubber coated nut. Ecrou surmoulé caoutchouc. Tuerca engomada.		EPDM	150		5100943	
			25		5101011	
			32		5101021	
			40		5100802	
			50		5100803	
			65		5100804	
 Gasket. For male DIN. Joint. Pour mâle DIN. Junta. Para macho DIN.		EPDM	80		5103669	
			25		5102330	
			32		5102331	
			40		5102332	
			50		5101803	
			65		5102333	
			80		5102334	
			100		5102335	
 Gasket. For male DIN. Joint. Pour mâle DIN. Junta. Para macho DIN.		NBR	125		5102336	
			150		5102066	
			25		5105340	
			32		5105341	
			40		5105342	
			50		5105343	
			65		5105344	
		NEW	80		5105345	
			100		5105346	

AL = Aluminium BR = Brass Laiton Latón ST = Steel Acier Acero SS = Stainless steel Inox PP = Polypropylene

Trelleborg Fittings 2018

		DN coupling Diam. raccord Diam. racor	DN shank Diam. douille Diam. espiga	Ref.	Notes
	Spanner. Clé de serrage. <i>Llave de presion.</i>	SS 304		5101543	
	Female. Serrated hose shank. With collar. Femelle. Douille crantée. A collerette. <i>Hembra. Caña acanalada. Con cuello.</i>	SS 316L	25 40 50 65 80 100	25 38 51 63 76 101,5	5102037 5101839 5101840 5101841 5101842 5101843
	Male. Serrated hose shank. With collar. Mâle. Douille crantée. A collerette. <i>Macho. Caña acanalada. Con cuello.</i>	SS 316L	40 50 65 80 100	38 51 63 76 101,5	5101844 5101845 5101846 5101847 5101868
	Female. Smooth shank. With collar. Femelle. Douille lisse. A collerette. <i>Hembra. Caña lisa. Con cuello.</i>	SS 316L	40 50 65 80	38 50,5 63 75	0100132 5100070 5100223 5100224
	Male. Smooth shank. With collar. Mâle. Douille lisse. A collerette. <i>Macho. Caña lisa. Con cuello.</i>	SS 316L	40 50 65 80	38 50,5 63 75	5100269 5100700 5101850 5101851
	Female for welding. Femelle à souder. <i>Hembra para soldar.</i>	SS 316L	25 32 40 50 65 80 100	28 34 40 52 70 85 104	5102054 5102055 5102056 5102057 5102058 5102059 5102060
	Male for welding. Mâle à souder. <i>Macho para soldar.</i>	SS 316L	25 32 40 50 65 80 100	28 34 40 52 70 85 104	5102337 5102338 5102339 5102340 5102341 5102342 5102343
	Viewer F50-M50 DIN 11851. Mireur F50-M50 DIN 11851. <i>Mirilla F50-M50 DIN 11851.</i>	SS	Rubber coated nut on request. Ecrou caoutchouc sur demande. <i>Tuerca engomada, consultarnos.</i>		5105081



page 160



page 160



page 160



page 160



DIN 11851

V04/07/2018

TECHNICAL INFORMATION

- Thread according DIN 405
- Shank according to EN 14420-2
- Material: stainless steel 316L/1.4404
- Working pressure: 16 bar

RELATED PRODUCTS

- UTS ferrules
- Safety clamps
- DIN 11851 gaskets



DIN			SS316L	
Female				
Part number	Coupling size (mm)	DN Hose (mm)	Notes	Stock
5103359	25	25		✓
5103360	32	32		✓
5103361	40	38		✓
5103362	50	50/51		✓
5103363	65	63		✓
5103364	80	75/76		✓
5103365	100	100/102		✓



DIN		SS316L		
Male				
Part number	Coupling size (mm)	DN Hose (mm)	Notes	Stock
5103368	25	25		✓
5103369	32	32		✓
5103370	40	38		✓
5103371	50	50/51		✓
5103372	65	63		✓
5103373	80	75/76		✓
5103374	100	100/102		✓