


Pompe RS II



Pump RS II

- Moteur résistant et à rendement élevé
- Joint tournant en céramique sur carbone
- Préfiltre transparent Lexan® avec papillons à fermeture et ouverture rapide
- Turbine haute performance en Noryl®
- Large panier de préfiltre (2950 cm³)
- Corps résistant à la corrosion chimique et saline

- *Heavy-Duty, high performance motor*
- *Heat-resistant, double sized ceramic seal*
- *Quick release, Lexan® "see-thru" strainer*
- *Maximum performance Noryl® impeller*
- *Large strainer basket (2950 cm³)*
- *Large, corrosion-proof housing*

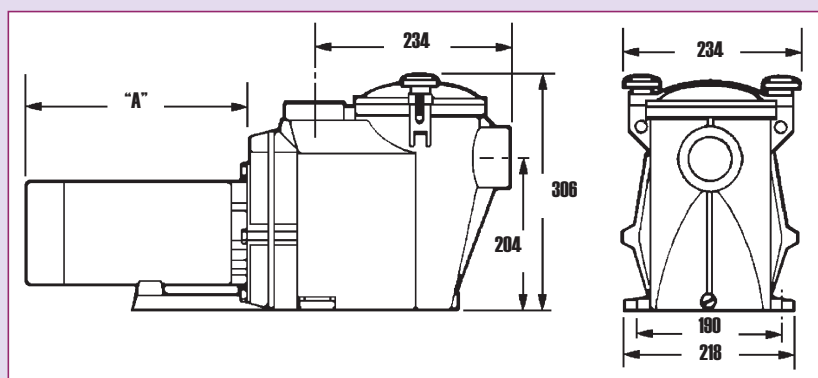

Dim "A"	Size "A"
RS3011	A : 213 mm
RS3016	A : 225 mm
RS3020	A : 230 mm
RS3025	A : 280 mm
RS3030	A : 280 mm

- La gamme RS II d'Hayward combine une performance technologique maximum allée à des matériaux inaltérables de part leurs résistances à la corrosion
- Les raccords unions facilitent l'installation et la maintenance de la pompe
- Conçue pour tous les types et pour toutes les dimensions de piscine, RS II vous offre une grande facilité d'installation et d'utilisation.
- Les dimensions généreuses de son panier de préfiltre permettent de réduire la fréquence de nettoyage
- Par ses hautes performances techniques et son faible niveau sonore, RS II répond à toutes vos exigences

- *Hayward's RS II is a series of large capacity, high technology pumps that blend cost-efficient design with durable corrosion-proof construction*
- *Connection fittings facilitate the installation and the maintenance of the pump*
- *Designed for pools of all types and sizes, RS II features a large "see-thru", strainer cover, super-size debris basket and exclusive "service-ease" design for extra convenience*
- *For super performance and safe, quiet operation, RS II sets a new standard of excellence and value. And you know its quality through-out because it's "made by Hayward"*



HAYWARD®



En quelques chiffres...

Some data...

Monophasée	CV/HP	CV/HP	Conso max	Débit*	Connection	Poids	Ampérage
One phase	PS	KW	Max. Wat.	Flow-rate*	In outlet	Weight	Amperage
RS30111	1	0.75	975 W	13	2"	15	4.3
RS30161	1.5	1.1	1100 W	17.5	2"	16	5
RS30201	2	1.5	1500 W	20.5	2"	16	7.25

Triphasée	CV/HP	CV/HP	Conso max	Débit*	Connection	Poids	Ampérage
Three phase	PS	KW	Max. Wat.	Flow-rate*	In outlet	Weight	Amperage
RS30203	2	1.5	1500 W	20.5	2"	16	5.2/3.0
RS30253	2.5	2.2	2600 W	25	2"	23	7.8/4.5
RS30303	3	2.2	2600 W	29	2"	23	7.8/4.5

*à 10 m de colonne d'eau - To 10 meter water height

Accessoires

Kit d'adaptation pompe RS II. Permet d'ajuster la hauteur de la pompe en fonction des raccordements existants
Pack raccordement 63 mm RS II. Facilite l'installation de la pompe

RS750EKIT

RS750EPAK

Accessories

Elevator base kit aids. In adjusting pump height to match existing plumbing
Fitting Pack 63 mm RS II. Facilitate the pump's installation

RS750EKIT

RS750EPAK



Kit d'adaptation - Elevator base kit



Raccords union (x2)
qui facilitent l'installation
et la maintenance
de la pompe.

Connection fittings (x2)
facilitate the installation
and the maintenance of the pump.

