

BLOWERS

The power of technology in silence

Applications

Specially designed for air or mixed whirlpool systems

Technical Features

The less noisy : <69.5dBa to 80 mBar

High powerful - High flow :

Blower A-500 : 36 m³/h to 80 mBar

Blower A-700 : 54 m³/h to 80 mBar

Blower A-900 : 85 m³/h to 80 mBar

4 silent blocks included («neoprene»)

Protection class II

Grooved or to be stuck outlet fittings

IP X5 in horizontal position

Blower A-500

Motor : 500 W

Heating option : 300W

Total power with heater : 800W

Blower A-700

Motor : 700 W

Heating option : 300W


Total power with heater : 1000W

Blower A-900



Motor : 900 W

Heating option : 300W

Total power with heater : 1200W

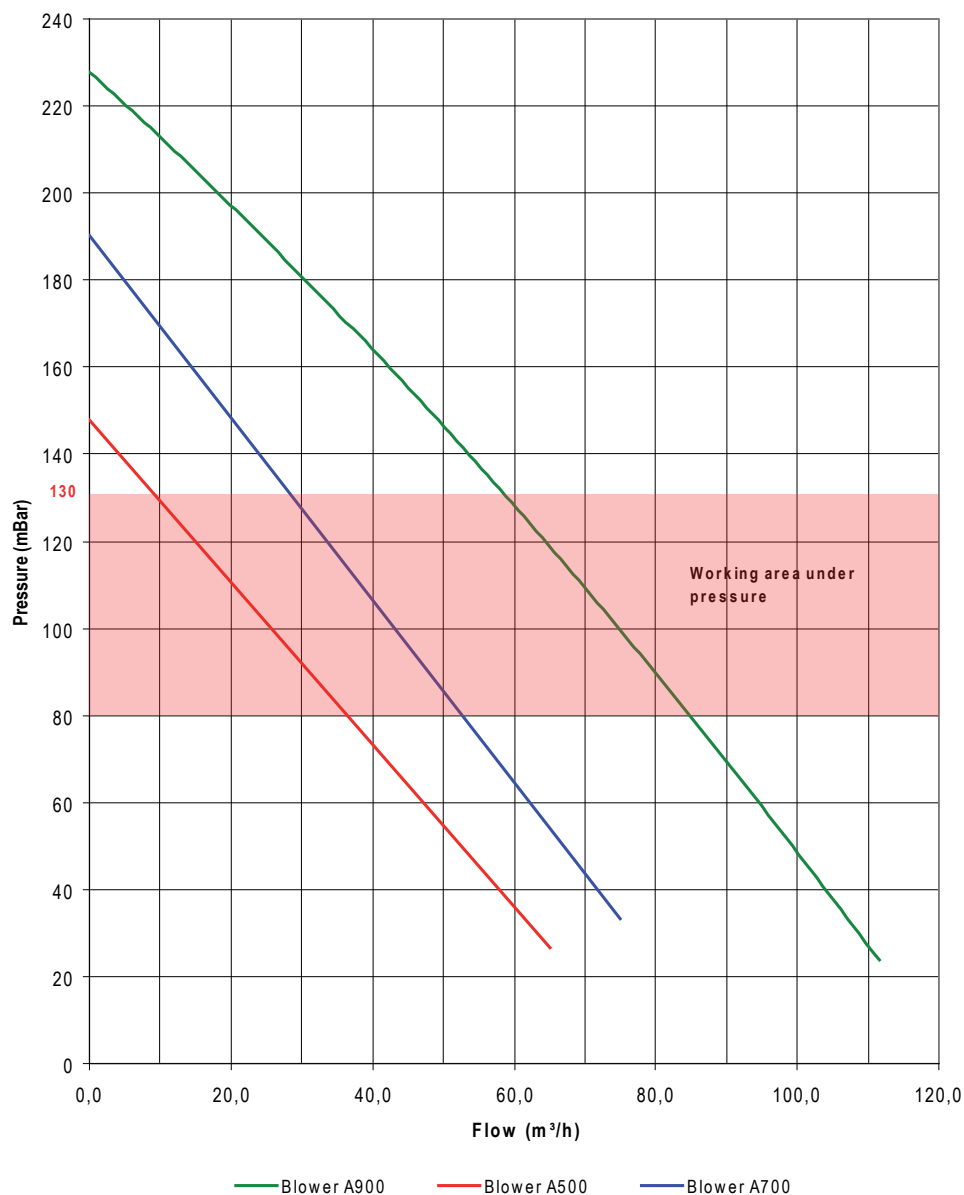

TUV CERTIFICATE

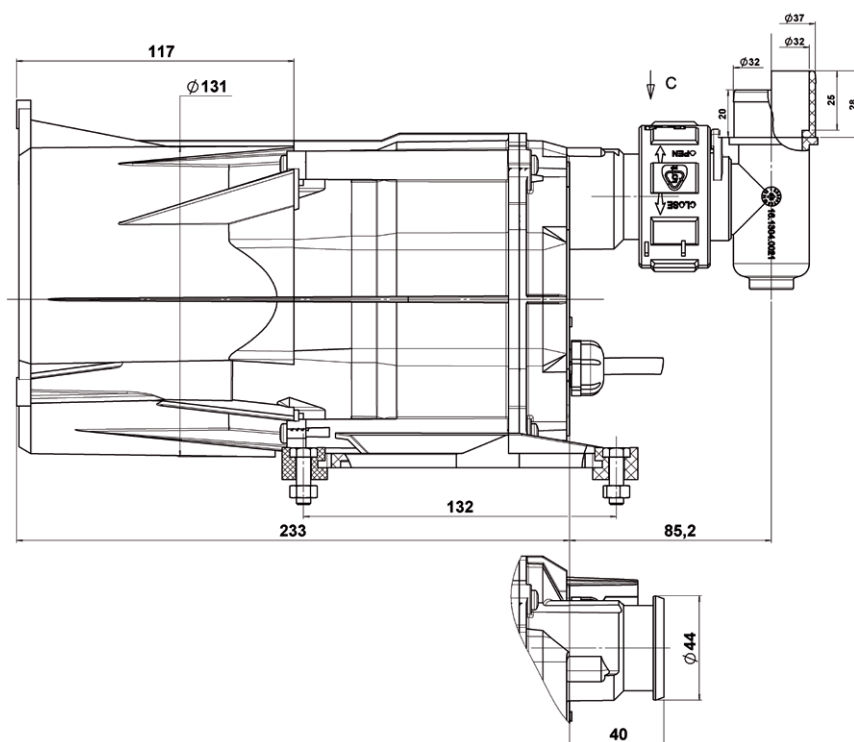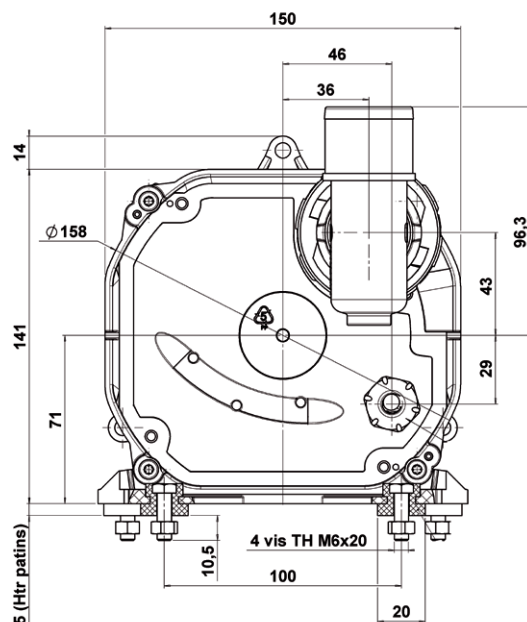

Options

220 V / 50 Hz
220 V / 60 Hz
110 V / 60 Hz

Variable speed :
130 V to 230 V (MV)

Pneumatic switch (CP)

Electric cable
0,5 / 1 / 1,5 / 2 / 2,5 m

1 function electric card for electric control
+ water level sensor (1F-EL)

1 function electric card for pneumatic
control + water level sensor (1F-CP)

General

These pumps comply with the standards
and directives in force

Conform to standards :
EN 60 335-1
EN 60 335-2-41

According to the CE regulation

Validated and qualified by the
organization TÜV

OPTIONS

HEATER «R»

- Electric power 300 watts
- Overload temperature : 80°C +/- -5°C
- Fuse thermal overload protection : 117°C +/- 5°C

OZONE LAMP «L» (printed circuit)

- Electric supply : 2,6 watts
- Intensity : 12mA

PNEUMATIC SWITCH «SA»

- Start pressure : 80mBar +/- 3 mBar
- Stop pressure : 110mBar +/- 3mBar

ACCESSORIES

Ref

SILENT BLOCK

- Silent block Ø20 - H20 threaded M6
- Pack of 4 silent block

2417000009
2417041018

PIPE

- Flexible pipe for air distributors Ø32
- Flexible pipe for air distributors Ø37

0822320008
Please ask us