

PRESTAZIONI - PERFORMANCES - CARACTERISTIQUES - LEISTUNGSBEREICH - PRESTACIONES

MEK/KV 80-45

Prestazioni a 50Hz, 2 poli

Performances at 50Hz, 2 poles

Caractéristiques à 50Hz, 2 pôles

Leistungsbereich bei 50Hz, 2-polig

Prestaciones a 50Hz, 2 polos

Pompa Pump Pompe Pumpe Bomba					Portata - Capacity - Débit - Fördermenge - Caudal										
					l/min m³/h l/s	0	250	500	550	600	650	700	800	900	1000
						0	15	30	33	36	39	42	48	54	60
						0	4,2	8,3	9,2	10	10,8	11,7	13,3	15	16,7
ME20K80-45/2P	ME20KV80-45/2P	•	15	20	H m	87	90	88	86	84	82	79	73	-	-
ME25K80-45/2A	ME25KV80-45/2A	•	18,5	25		96,4	99	99,2	97,8	96	93,5	91	85	77,5	66,9
ME25K80-45/2P	ME25KV80-45/2P	•	18,5	25		100	105	106	105	104	103	101	96	-	-
ME30K80-45/2A	ME30KV80-45/2A	•	22	30		108	116	118	117	116	115	113	109	104	96
ME30K80-45/3P	ME30KV80-45/3P	•	22	30		132	136	133	130	127	124	120	110	-	-
ME35K80-45/3A	ME35KV80-45/3A		26	35		136	139	137	135	132	129	126	117	107	93
ME35K80-45/3A	ME35KV80-45/3A	•	30	40		136	139	137	135	132	129	126	117	107	93
ME35K80-45/3P	ME35KV80-45/3P		26	35		144	149	149	147	144	141	137	129	-	-
ME35K80-45/3P	ME35KV80-45/3P	•	30	40		144	149	149	147	144	141	137	129	-	-
ME40K80-45/3A	ME40KV80-45/3A	•	30	40		148	153	155	154	151	148	145	136	124	105
ME40K80-45/3P	ME40KV80-45/3P	•	30	40		162	166	166	165	163	161	158	151	-	-
ME50K80-45/3A	ME50KV80-45/3A	•	37	50		170	175	175	174	172	170	168	162	152	140
ME50K80-45/4P	ME50KV80-45/4P	•	37	50		200	207	209	208	206	202	199	187	-	-
ME60K80-45/4A	ME60KV80-45/4A	•	45	60		217	223	223	221	218	216	212	204	191	172

Dimensioni di ingombro in mm e peso in kg

Overall dimensions in mm and weight in kg

Dimensions en mm et masse en kg

Abmessungen in mm, Gewicht in kg

Medidas en mm, peso en kg

* Per le dimensioni di ingombro e i pesi dei motori vedere pagg. 28 - 29

* For motors overall dimensions and weights please refer to pages 28 - 29

* Pour les dimensions et les masses des moteurs voir pages 28 - 29


* Gesamtlänge und Gewichte der Unterwassermotoren, siehe Seiten 28 - 29

* Para la dimensiones y los pesos de los motores, consulte las páginas 28 - 29





Pompa Pump Pompe Pumpe Bomba	IEC	A	B	C	D	E	Peso Weight Masse Gewicht Peso	
							Pompa Pump Pompe Pumpe Bomba	Motore Motor Moteur Motor Motor
ME20K80-45/2P	•	*	231	*	*	371	105	*
ME25K80-45/2A	•	*	231	*	*	371	105	*
ME25K80-45/2P	•	*	231	*	*	371	105	*
ME30K80-45/2A	•	*	231	*	*	371	105	*
ME30K80-45/3P	•	*	301	*	*	441	126	*
ME35K80-45/3A	*	*	301	*	*	441	126	*
ME35K80-45/3A	•	*	301	*	*	441	127	*
ME35K80-45/3P	*	*	301	*	*	441	126	*
ME35K80-45/3P	•	*	301	*	*	441	127	*
ME40K80-45/3A	•	*	301	*	*	441	127	*
ME40K80-45/3P	•	*	301	*	*	441	127	*
ME50K80-45/3A	•	*	301	*	*	441	127	*
ME50K80-45/4P	•	*	371	*	*	511	148	*
ME60K80-45/4A	•	*	371	*	*	118	193	*


Pompa Pump Pompe Pumpe Bomba	IEC	A	B	C	D	E	Peso Weight Masse Gewicht Peso	
							Pompa Pump Pompe Pumpe Bomba	Motore Motor Moteur Motor Motor
ME20KV80-45/2P	•	*	203	*	*	-	112	*
ME25KV80-45/2A	•	*	203	*	*	-	112	*
ME25KV80-45/2P	•	*	203	*	*	-	112	*
ME30KV80-45/2A	•	*	203	*	*	-	112	*
ME30KV80-45/3P	•	*	273	*	*	-	133	*
ME35KV80-45/3A	*	*	273	*	*	-	133	*
ME35KV80-45/3A	•	*	273	*	*	-	134	*
ME35KV80-45/3P	*	*	273	*	*	-	133	*
ME35KV80-45/3P	•	*	273	*	*	-	134	*
ME40KV80-45/3A	•	*	273	*	*	-	134	*
ME40KV80-45/3P	•	*	273	*	*	-	134	*
ME50KV80-45/3A	•	*	273	*	*	-	134	*
ME50KV80-45/4P	•	*	343	*	*	-	155	*
ME60KV80-45/4A	•	*	343	*	*	-	158	*

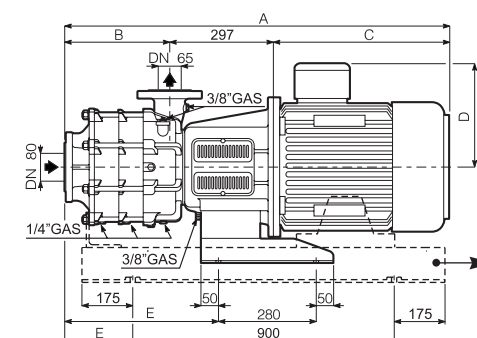


Per ME60...
For ME60...
Pour ME60...
Für ME60...
Para ME60...




Flangia premente
Delivery flange
Bride de refoulement
Druckstutzen
Brida impulsión



Flangia aspirante
Suction flange
Bride d'aspiration
Saugstutzen
Brida aspiración




(Possibili orientamenti)
(Possible orientations)
(Orientations possibles)
(Möglichen Orientierungen)
(Orientaciones posibles)

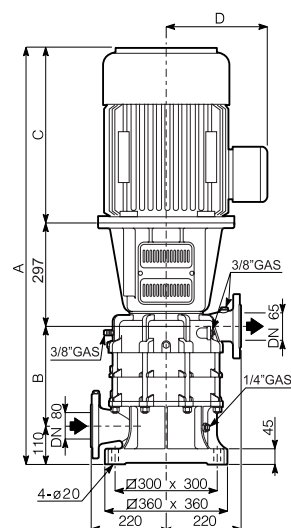

PRESTAZIONI - PERFORMANCES - CARACTERISTIQUES - LEISTUNGSBEREICH - PRESTACIONES

MEK/KV 80-45

Prestazioni a 50Hz, 2 poli
Performances at 50Hz, 2 poles
Caractéristiques à 50Hz, 2 pôles
Leistungsbereich bei 50Hz, 2-polig
Prestaciones a 50Hz, 2 polos

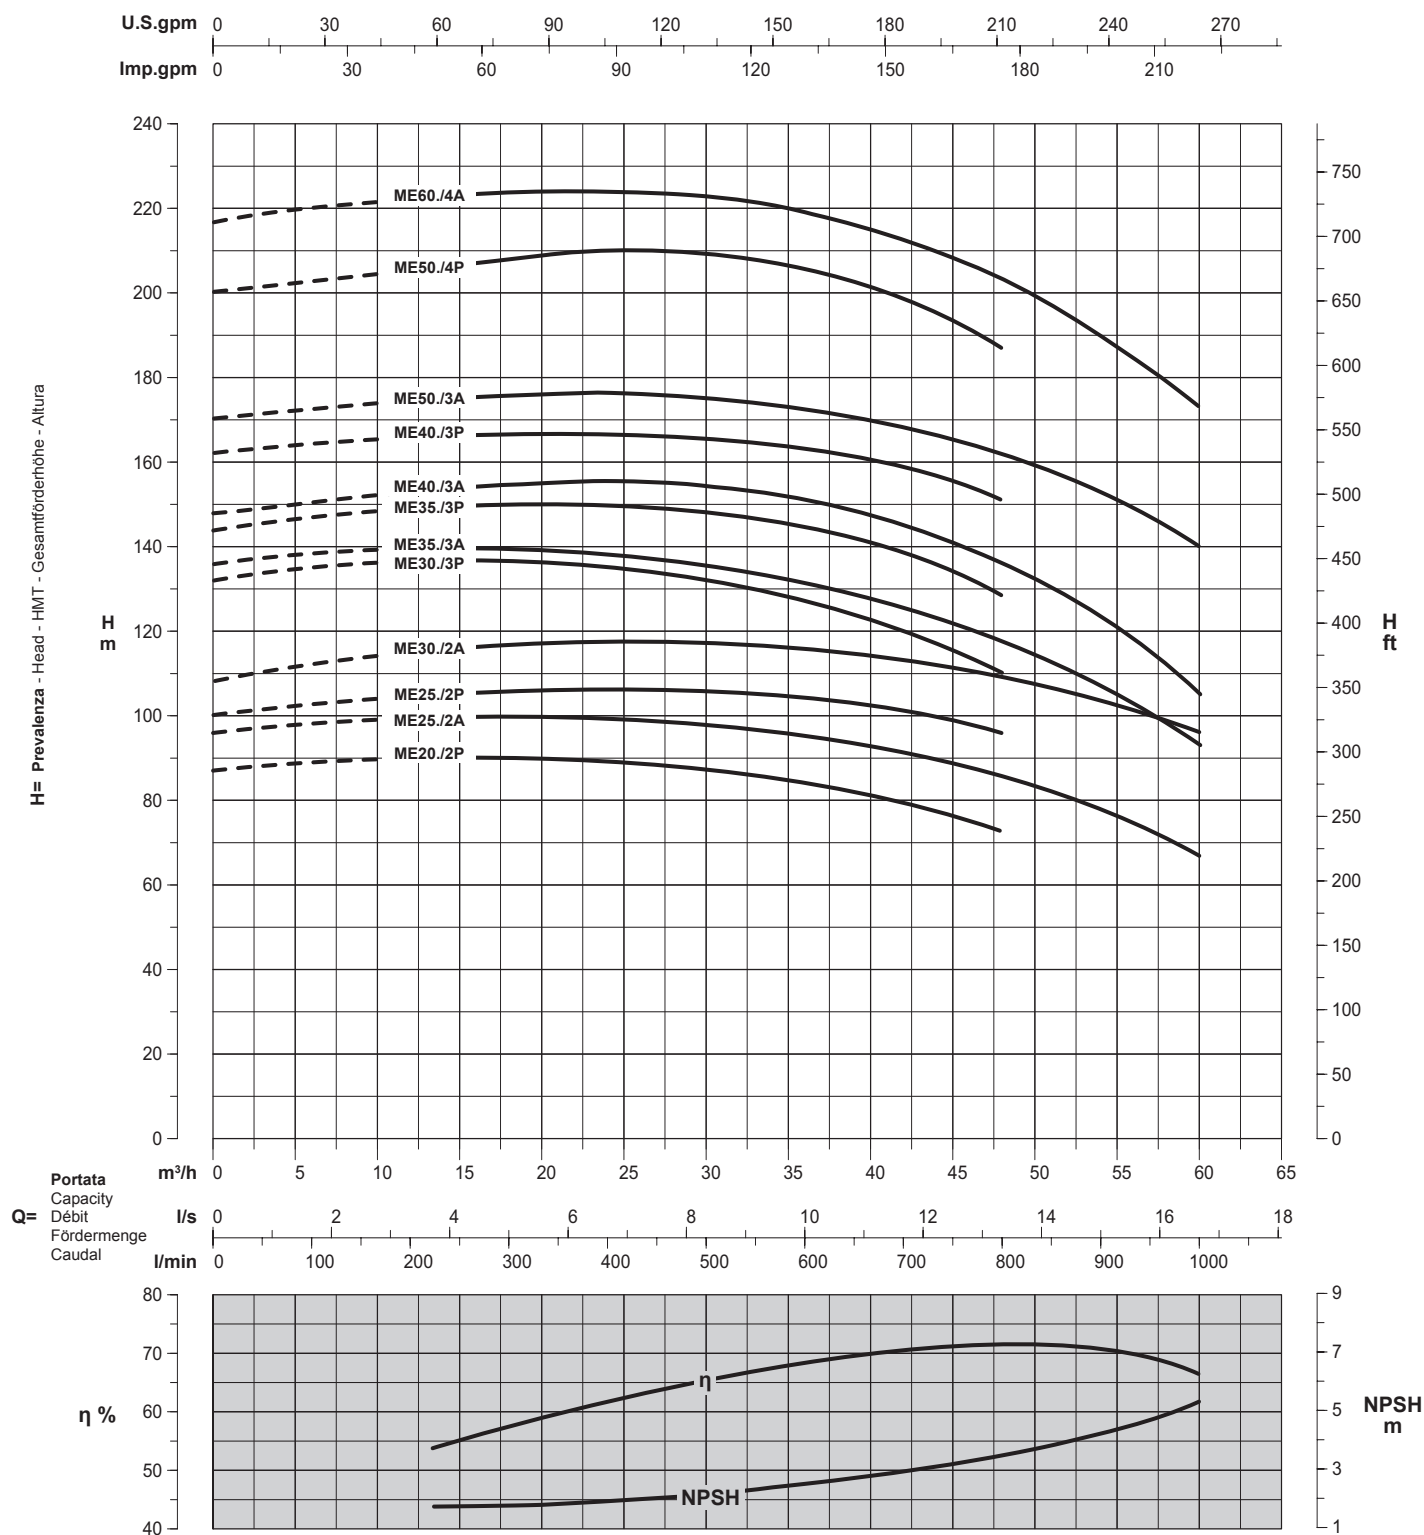

Possibili aggiornamenti senza preavviso - Revision possible without prior notice - Mises à jour éventuelles sans préavis - Techn. Änderungen vorbehalten - Posibles actualizaciones sin preaviso