

PRESTAZIONI - PERFORMANCES - CARACTERISTIQUES - LEISTUNGSBEREICH - PRESTACIONES

MEK/KV 80-90

Prestazioni a 50Hz, 2 poli

Performances at 50Hz, 2 poles

Caractéristiques à 50Hz, 2 pôles

Leistungsbereich bei 50Hz, 2-polig

Prestaciones a 50Hz, 2 polos

Pompa Pump Pompe Pumpe Bomba					Portata - Capacity - Débit - Fördermenge - Caudal													
					l/min	0	1000	1100	1200	1300	1400	1500	1600	1700	1800			
					m³/h	0	60	66	72	78	84	90	96	102	108			
					l/s	0	16,7	18,3	20	21,7	23,3	25	26,7	28,3	30			
IEC	kW	HP	H m	ME25K80-90/1P	ME25KV80-90/1P	•	18,5	25	59	58,8	58,2	57	56	54	53	51	48	-
ME30K80-90/2P	ME30KV80-90/2P	•		22	30	83	76,7	74	71	69	65	-	-	-	-	-	-	
ME35K80-90/2A	ME35KV80-90/2A			26	35	87	81,5	79	76	73	69,5	66	63	58	52,5	52,5		
ME35K80-90/2A	ME35KV80-90/2A	•		30	40	87	81,5	79	76	73	69,5	66	63	58	52,5	52,5		
ME35K80-90/2P	ME35KV80-90/2P			26	35	92,5	89	86,5	84	81	78	74	-	-	-	-		
ME35K80-90/2P	ME35KV80-90/2P	•		30	40	92,5	89	86,5	84	81	78	74	-	-	-	-		
ME40K80-90/2A	ME40KV80-90/2A	•		30	40	95	91,6	89,5	87,2	84,5	81	76,5	73	67,2	62,5	62,5		
ME40K80-90/2P	ME40KV80-90/2P	•		30	40	102	99,5	97,5	95	93	90	-	-	-	-	-		
ME50K80-90/2A	ME50KV80-90/2A	•		37	50	112	109	107	105	103	100	97	93,5	89	84,2	84,2		
ME50K80-90/2P	ME50KV80-90/2P	•		37	50	116	114	112	111	108	106	102	98	-	-	-		
ME60K80-90/3A	ME60KV80-90/3A	•		45	60	136	131	127	124	120	115	110	105	99	92,5	92,5		
ME60K80-90/3P	ME60KV80-90/3P	•		45	60	148	142	139	135	131	126	121	-	-	-	-		
ME75K80-90/3A	ME75KV80-90/3A			55	75	178	167	164	162	158	154	149	144	137	130	130		
ME75K80-90/3A	ME75KV80-90/3A	•		55	75	178	167	164	162	158	154	149	144	137	130	130		
ME75K80-90/3P	ME75KV80-90/3P			55	75	175	169	167	164	160	156	151	147	140	-	-		
ME75K80-90/3P	ME75KV80-90/3P	•		55	75	175	169	167	164	160	156	151	147	140	-	-		
ME100K80-90/4A	ME100KV80-90/4A	•	75	100	237	223	219	216	211	205	199	192	183	173	173			

Dimensioni di ingombro in mm e peso in kg

Overall dimensions in mm and weight in kg

Dimensions en mm et masse en kg

Abmessungen in mm, Gewicht in kg

Medidas en mm, peso en kg

* Per le dimensioni di ingombro e i pesi dei motori vedere pagg. 28 - 29

* For motors overall dimensions and weights please refer to pages 28 - 29

* Pour les dimensions et les masses des moteurs voir pages 28 - 29


* Gesamtlänge und Gewichte der Unterwassermotoren, siehe Seiten 28 - 29

* Para la dimensiones y los pesos de los motores, consulte las páginas 28 - 29




Pompa Pump Pompe Pumpe Bomba	IEC	A	B	C	D	E	F	G	H	P	Q	R	S	Peso Weight Masse Gewicht Peso
ME25K80-90/1P	•	*	161	*	*	301	297	-	-	-	-	-	-	84
ME30K80-90/2P	•	*	231	*	*	371	297	-	-	-	-	-	-	105
ME35K80-90/2A	•	*	231	*	*	371	297	-	-	-	-	-	-	105
ME35K80-90/2A	•	*	231	*	*	371	297	-	-	-	-	-	-	106
ME35K80-90/2P	•	*	231	*	*	371	297	-	-	-	-	-	-	105
ME35K80-90/2P	•	*	231	*	*	371	297	-	-	-	-	-	-	106
ME40K80-90/2A	•	*	231	*	*	371	297	-	-	-	-	-	-	106
ME40K80-90/2P	•	*	231	*	*	371	297	-	-	-	-	-	-	106
ME50K80-90/2A	•	*	231	*	*	371	297	-	-	-	-	-	-	106
ME50K80-90/2P	•	*	231	*	*	371	297	-	-	-	-	-	-	106
ME60K80-90/3A	•	*	301	*	*	48	297	900	175	555	585	325	545	172
ME60K80-90/3P	•	*	301	*	*	48	297	900	175	555	585	325	545	172
ME75K80-90/3A	•	*	301	*	*	48	297	900	175	555	585	325	545	172
ME75K80-90/3A	•	*	301	*	*	48	297	900	175	555	585	325	545	202
ME75K80-90/3P	•	*	301	*	*	48	297	900	175	555	585	325	545	172
ME75K80-90/3P	•	*	301	*	*	48	327	900	175	555	585	325	545	202
ME100K80-90/4A	•	*	371	*	*	230	327	945	225	690	720	380	600	223

Pompa Pump Pompe Pumpe Bomba	IEC	A	B	C	D	E	F	Peso Weight Masse Gewicht Peso
ME25KV80-90/1P	•	*	133	*	*	-	297	91
ME30KV80-90/2P	•	*	203	*	*	-	297	112
ME35KV80-90/2A	•	*	203	*	*	-	297	112
ME35KV80-90/2A	•	*	203	*	*	-	297	113
ME35KV80-90/2P	•	*	203	*	*	-	297	112
ME35KV80-90/2P	•	*	203	*	*	-	297	113
ME40KV80-90/2A	•	*	203	*	*	-	297	113
ME40KV80-90/2P	•	*	203	*	*	-	297	113
ME50KV80-90/2A	•	*	203	*	*	-	297	113
ME50KV80-90/2P	•	*	203	*	*	-	297	113
ME60KV80-90/3A	•	*	273	*	*	-	297	137
ME60KV80-90/3P	•	*	273	*	*	-	297	137
ME75KV80-90/3A	•	*	273	*	*	-	297	137
ME75KV80-90/3A	•	*	273	*	*	-	327	167
ME75KV80-90/3P	•	*	273	*	*	-	297	137
ME75KV80-90/3P	•	*	273	*	*	-	327	167
ME100KV80-90/4A	•	*	343	*	*	-	327	188

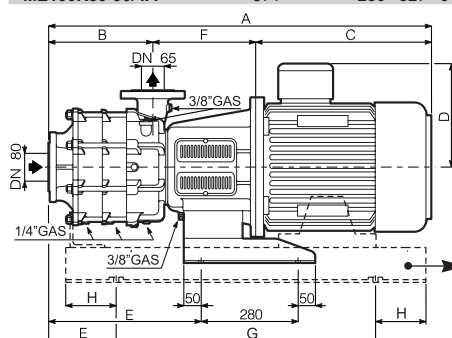


Per ME60... / ME75... / ME100...
For ME60... / ME75... / ME100...
Pour ME60... / ME75... / ME100...
Für ME60... / ME75... / ME100...
Para ME60... / ME75... / ME100...


Flangia premente
Delivery flange
Bride de refoulement
Druckstutzen
Brida impulsión



Flangia aspirante
Suction flange
Bride d'aspiration
Saugstutzen
Brida aspiración




(Possibili orientamenti)
(Possible orientations)
(Orientations possibles)
(Möglichen Orientierungen)
(Orientaciones posibles)

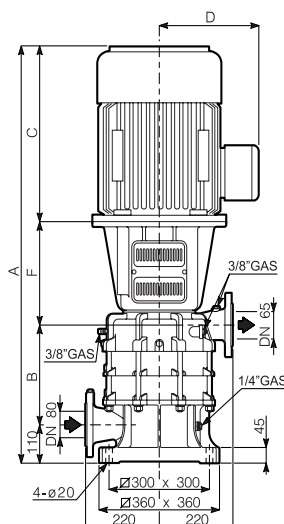

PRESTAZIONI - PERFORMANCES - CARACTERISTIQUES - LEISTUNGSBEREICH - PRESTACIONES

MEK/KV 80-90

Prestazioni a 50Hz, 2 poli
Performances at 50Hz, 2 poles
Caractéristiques à 50Hz, 2 pôles
Leistungsbereich bei 50Hz, 2-polig
Prestaciones a 50Hz, 2 polos

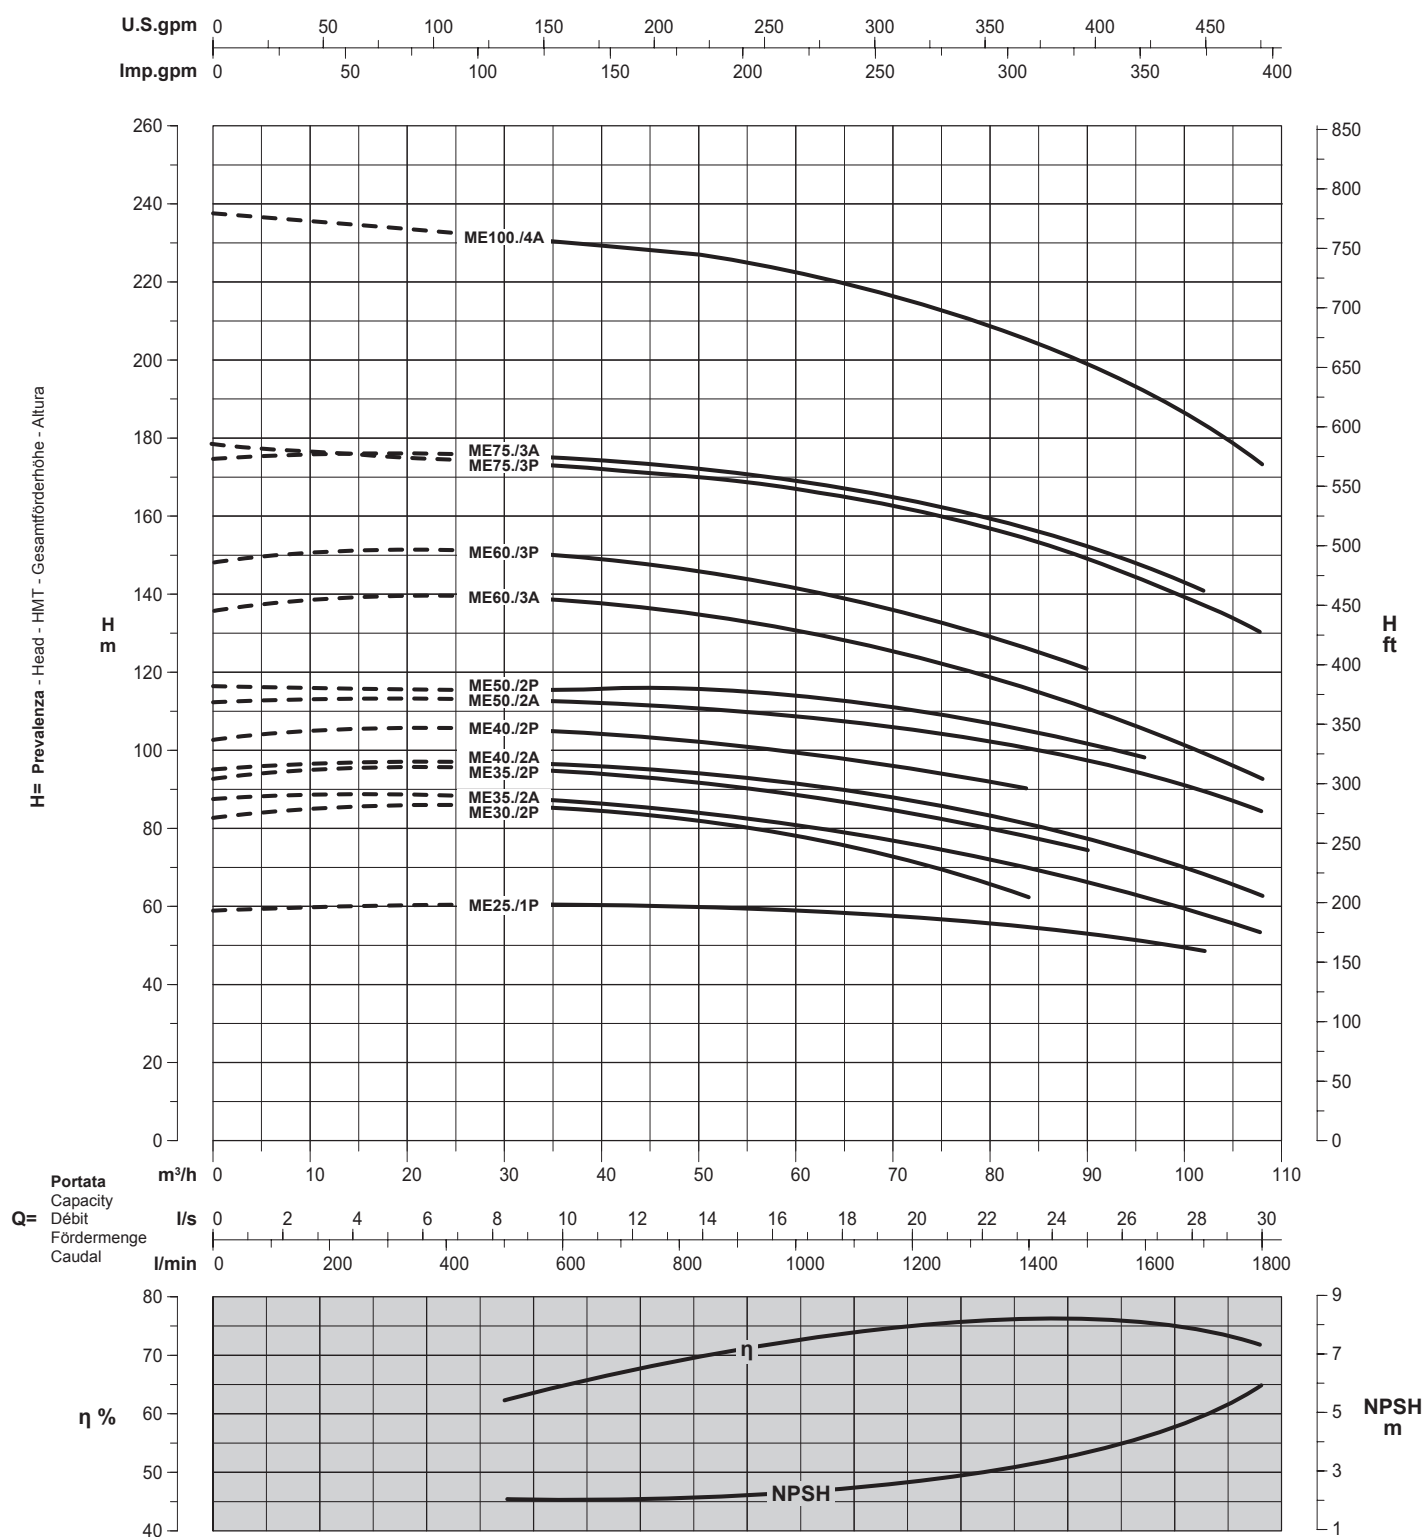

Curve per liquidi aventi densità 1000 kg/m³ - viscosità 1 mm²/s alla temperatura di 20°C
Curves established for liquid density 1000 kg/m³ - viscosity 1 mm²/s - temperature 20°C
Courbes établies pour liquides densité 1000 kg/m³ - viscosité 1 mm²/s - température 20°C
Leistungskurve für Flüssigkeiten mit Dichtigkeit von 1000 kg/m³ - Viskosität 1 mm²/s - Temp. 20°C
Curvas para líquidos con densidad 1000 kg/m³ - viscosidad 1 mm²/s a la temperatura de 20°C

Rendimento della pompa
Pump efficiency
Rendement de la pompe
Wirkungsgrad
Eficiencia de la bomba

Riduzione rendimento
Efficiency reduction
Réduction du rendement
Leistungsminderung
Reducción de eficiencia

/1	=	-2
/2	=	-1
/3	=	-

Possibili aggiornamenti senza preavviso - Revision possible without prior notice - Mises à jour éventuelles sans préavis - Techn. Änderungen vorbehalten - Posibles actualizaciones sin preaviso